

## MODUBELT

### Modular mass conveying systems

How would you like to avoid the long lead times and haggling that can make buying a new conveyor so frustrating? Now you can reduce costs, *and* secure a reliable system that meets your specific requirements.

CANLINE Systems introduces a new and cost-effective approach to conveying systems for handling empty or filled inflexible items such as cans, bottles, boxes, trays and crates: complete wide-belt conveyors.

We offer a complete range of modules so you can design and assemble your own wide-belt conveyor system according to your own particular requirements. The systems are supplied as a complete package and can be easily assembled without the need for special tools.

CANLINE Systems specialists are, of course, available to give you technical advice and assistance should you need it. Our modular systems can, moreover, be simply adapted or extended to suit new requirements.

The reliable design, short delivery time and low installation and maintenance costs guarantee an extremely versatile and cost-effective solution to all your conveying needs. We equip our conveyors with A-brand belts because we believe product support is as important as product quality.

CANLINE Systems can, of course, also supply complete tailor-made systems on a turn-key basis or indeed anything in between e.g. part systems.



#### Important advantages of the system

- Competitive pricing
- Low assembling cost
- Fast delivery
- Reliable design
- Quick installation (no special tools needed)
- Versatility in layout
- Maintenance friendly




### Technical information

The wide-belt conveyor modules are available in the following standard widths:

- 400 mm (16")
- 600 mm (24")
- 900 mm (36")
- 1200 mm (48")

Basic modules:	drive station straight section return station corner transfer side transfer straight transfer
Standard materials:	mild steel, painted aluminium, anodised
Standard equipment	SEW drive motors, 0.37 - 1.1 kW, 30/400 V, protection class IP54 Modular plastic belting (A-brand)
Max. belt loading:	500 N/m <sup>2</sup> evenly spread / HG: 1000 N/m <sup>2</sup>
Max. conveyor length:	depends on loading and type of belt
Ambient conditions:	humidity <100% temperature -5 - +60 °C

For more information on our wide-belt conveyors or our magnetic conveyor systems such as elevators, lowerators, end-handling systems and other magnetic components please contact one of our advisers in Eersel.

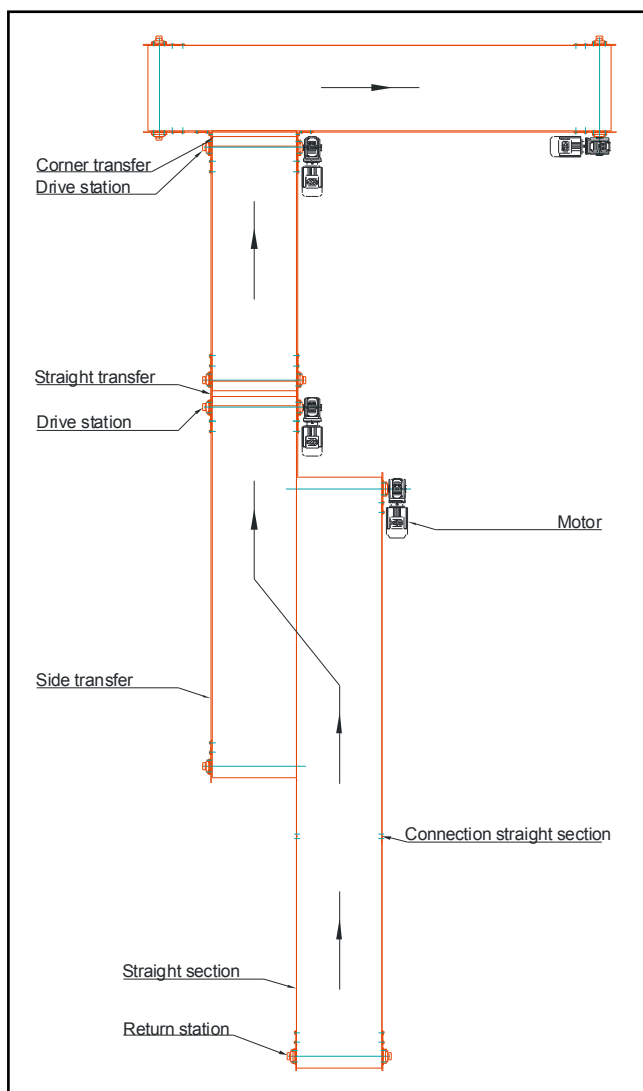

## CANLINE Systems BV

CANLINE Systems BV • Nijverheidsstraat 18 • 5531AA Bladel • The Netherlands  
 Phone: +31 (0) 497 531 100 • Fax: +31 (0) 497 531 109 • E-mail: info@canline.nl • www.canline.nl